## (19) World Intellectual Property Organization International Bureau





(43) International Publication Date 26 May 2005 (26.05.2005)

**PCT** 

## (10) International Publication Number WO 2005/047083 A1

(51) International Patent Classification<sup>7</sup>: 5/04, 5/06, 7/04, 7/16, 13/02, 59/04

B62D 5/02,

(21) International Application Number:

PCT/AU2004/001546

(22) International Filing Date:

9 November 2004 (09.11.2004)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data: 2003906278

13 November 2003 (13.11.2003) AU

(71) Applicant (for all designated States except US): TRACK-AXLE PTY LTD. [AU/AU]; PO Box 6757, Shepparton, Victoria 3632 (AU).

(72) Inventor; and

(75) Inventor/Applicant (for US only): ATLEY, Kerry [AU/AU]; PO Box 6757, Shepparton, Victoria 3632 (AU).

(74) Agent: WATERMARK PATENT & TRADEMARK ATTORNEYS; 290 Burwood Road, Hawthorn, Victoria 3122 (AU).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW


(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

## Published:

with international search report

[Continued on next page]

(54) Title: DRIVEN STEER CARRIAGE

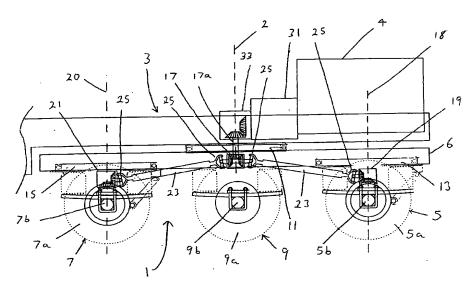

(57) Abstract: A vehicle having a main chassis (3) and a power source (4) for driving the vehicle, a drivable steer carriage (1) pivotally supporting the main chassis (3) about an at least substantially upright pivotal axis (2), the carriage including a plurality of opposed pairs of carriage wheels (5a, 7a, 9a), at least one said pair of carriage wheels being driven by a drive transmission including an input shaft (17a) at least substantially aligned with said upright pivotal axis (2) such that the power source (4) can transfer power through the input shaft (17a) to at least one carriage wheel pair.

05/047083 A1

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.